ORDER NO. ARD-7803012C

Service Manual

RP-9690

Remote Control Box

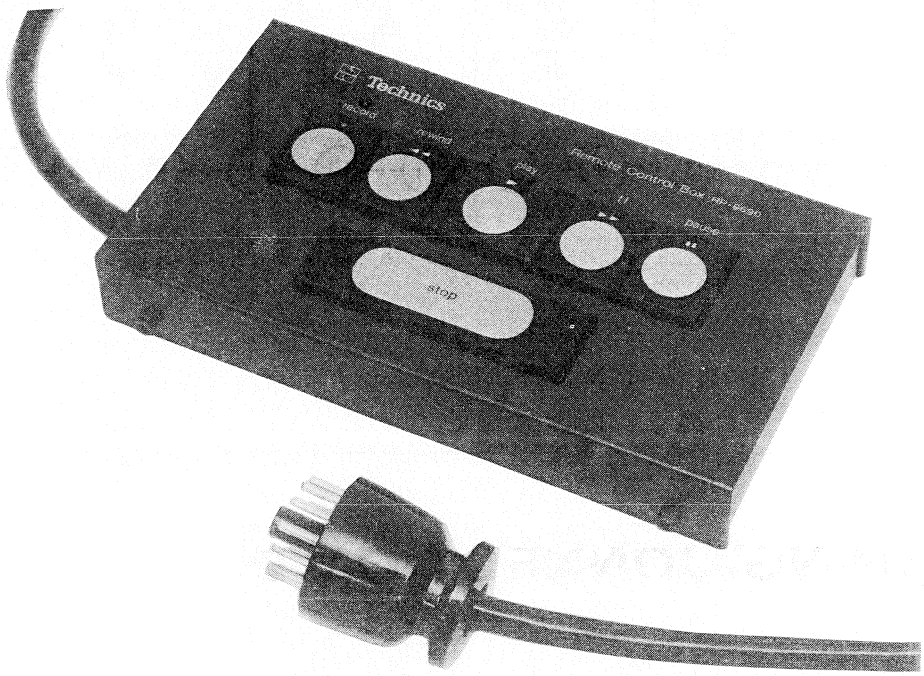

RP-9690 is designed for Model RS-1500US, RS-1506US, RS-9900US and RS-M85.

Specifications

Dimensions:	19.0cm(W)×3.3cm(H)×10.7cm(D) [7-1/2"(W)×1-1/4"(H)×4-1/4"(D)]
Weight:	1.1kg (2-1/2lbs.)
Cord lenght:	5m (16-3/8ft.)
Connection plug:	12-pin type

Weight and dimensions shown are approximate.

Technics

Matsushita Electric Trading Co., Ltd.
P.O. Box 288, Central Osaka Japan

SCHEMATIC DIAGRAM MODEL RP-9690

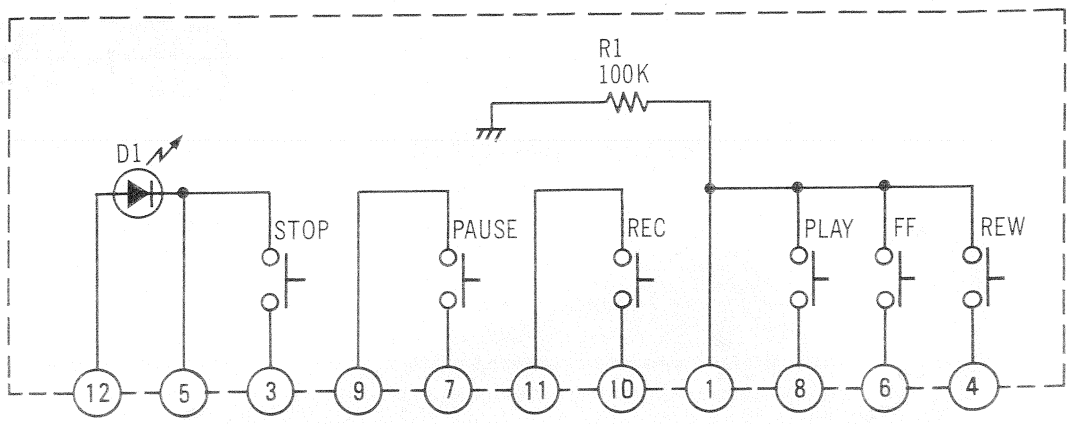

WIRING CONNECTION DIAGRAM

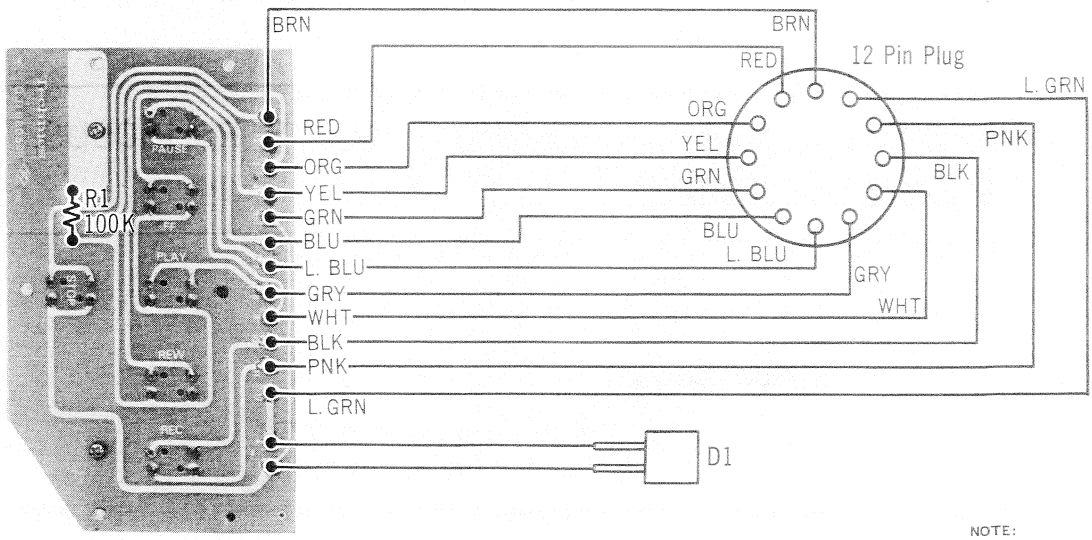

NOTE:

BLK ·····Black
BLU ·····Blue
BRN·····Brown
GRY·····Gray
GRN·····Green
L. BLU···Light Blue
NIL ·····No Color Mark
ORG·····Orange
PNK·····Pink
RED·····Red
SLD·····Shield Wire
VLT·····Violet
WHT·····White
YEL·····Yellow

PARTS LOCATION

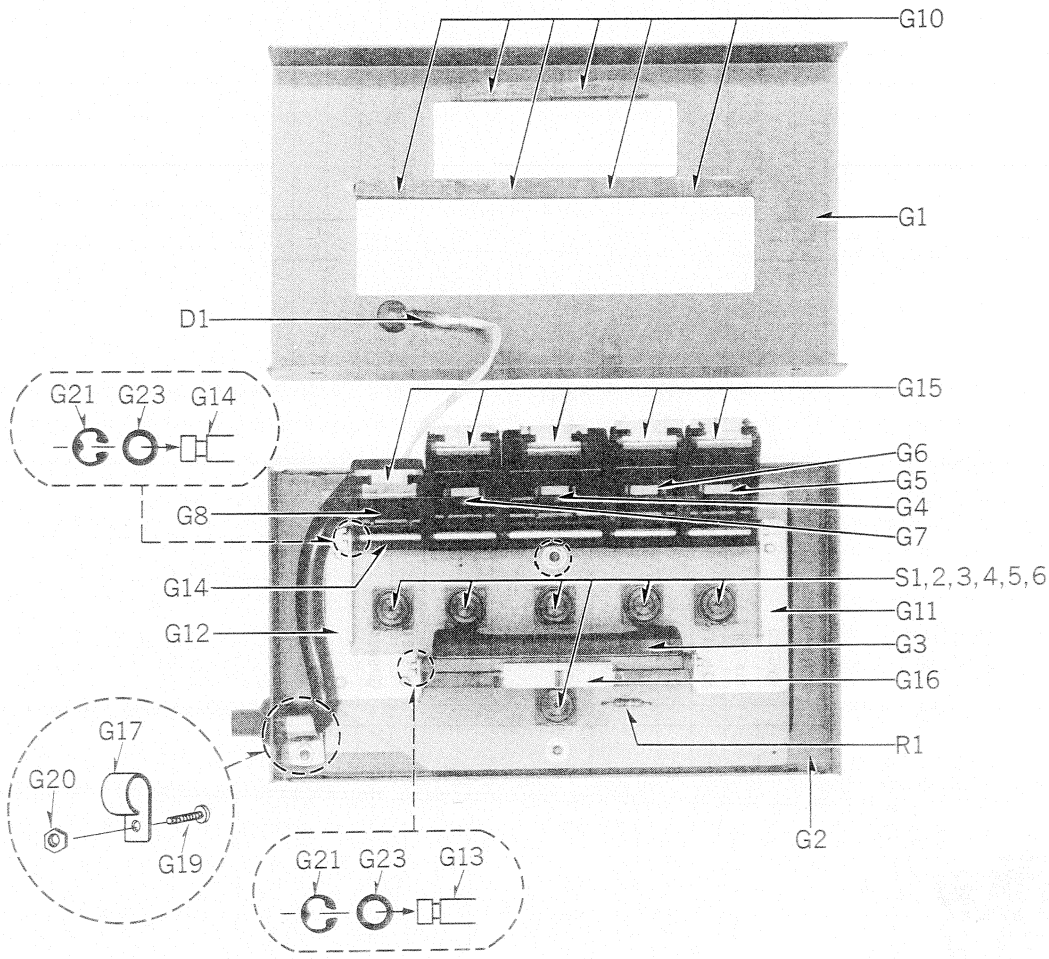

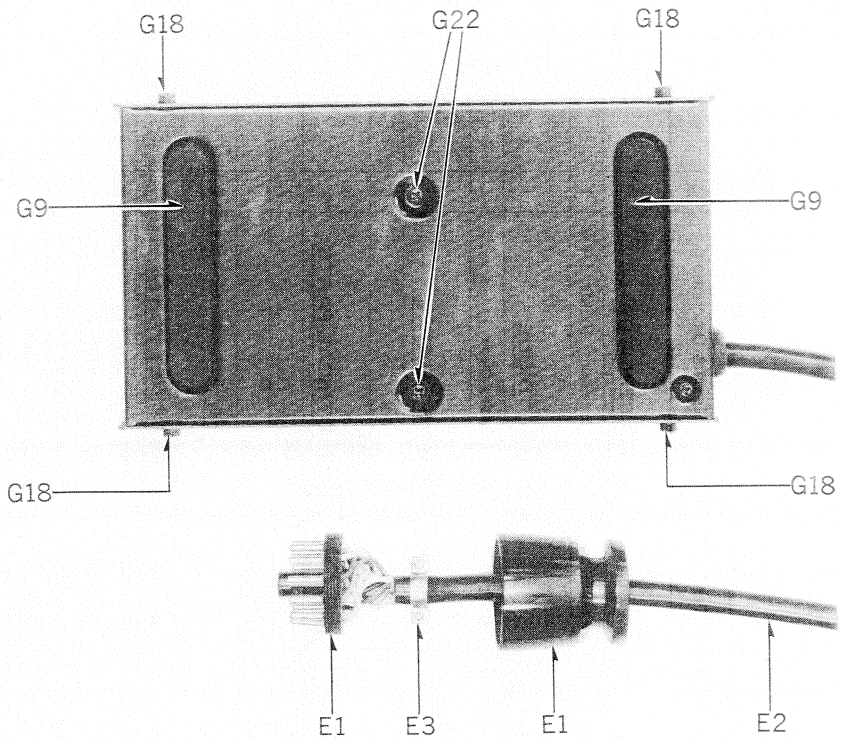

REPLACEMENT PARTS LIST

MODEL RP-9690 (Technics)



RP-9690

Ref. No.	Part No.	Part Name & Description	Pcs/ Set	Remarks
		RESISTOR		
R1	ERD25TJ104	Carbon Resistor 100KΩ 1/4W	1	
		DIODE		
D1	LN25D	Light Emitting Diode	1	
		SWITCHES		
S1, 2, 3, 4, 5, 6	EVQPAR11K	Push Switch	6	
		ELECTRICAL PARTS		
E1	QJP0958	12Pin Plug	1	
E2	QFC2037	Cable	1	
E3	QTD1175	Cord Stopper-A	2	
		CABINET PARTS		
G1	QGP1457	Panel	1	
G2	QGC1072	Bottom Cover	1	
G3	QXB0425	Stop Button Assembly	1	
G4	QXB0426	Playback Button Assembly	1	
G5	QXB0427	Pause Button Assembly	1	
G6	QXB0428	Fast Forward Button Assembly	1	
G7	QXB0429	Rewind Button Assembly	1	
G8	QXB0430	Record Button Assembly	1	
G9	QBG1580	Rubber Cushion	2	
G10	QSF0008	Magnet	6	
G11	QMA3038	Button Holding Angle-Right	1	
G12	QMA3037	Button Holding Angle-Left	1	
G13	QMN2125	Shaft-A	1	
G14	QMN2124	Shaft-B	1	
G15	QMA3064	Stopper Angle-A	5	
G16	QMA3065	Stopper Angle-B	1	
G17	QTD1246	Cord Stopper-B	1	
G18	XXE3A6FZS	Screw	4	
G19	XSN3+10S	Screw	1	
G20	XNG3ES	Nut	1	
G21	XUC25FT	Stop Ring	4	
G22	XSN3+6S	Screw	8	
G23	QBK1252	Fiber Washer	4	
		ACCESSORY		
A1	QQT2106	Instruction Book	1	
		PACKINGS		
P1	QPN3537	Inside Carton	1	
P2	QPS0247	Spacer-A	1	
P3	QPS0248	Spacer-B	1	
P4	QPS0249	Spacer-C	1	

Printed in Japan